


TKS-40

HYDRAULIC DRIVEN



INCLUDED

R.O.T. SYSTEM
Electric Tilting System

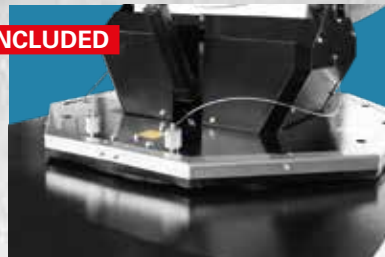

INCLUDED

R.O.T. SYSTEM
Automatic Oscillation 340 °



INCLUDED

R.O.T. SYSTEM
Remote Control 50mt range



TKS-40

HYDRAULIC DRIVEN



Ideal for medium/large size outdoor areas. Fully automatic, **equipped with Hydraulic generator**, used in demolition and with predisposition to be connected to telehandlers.

R.O.T. SYSTEM as standard feature

- **Electric Tilting System**
- **Automatic oscillation 0 - 340°**
- **Remote control, 50 mt range with all functions: switch on/off the fan, pump and electric rotation**

STANDARD FEATURES

- Integrated control panel
- **Hydraulic generator (included)**
- SMART START SYSTEM
- Emergency stop button
- Water pump
- Water pressure Gauge
- Water Safety pressure switch
- Central lifting eye
- Safety Automatic clutch compliant with HSE norm
- Stainless steel crown with 24 nozzles
- Skid base with forklift pockets

OPTIONS

- 60 Hz
- External pump for chemicals additives
- 2000 lt water tank with pump on skid
- 2000 lt water tank with pump on site tow trailer
- Reel winder for water pipe



HYDRAULIC GENERATOR included



Integrated **CONTROL PANEL**



Central **LIFTING EYE**



Safety **PRESSURE SWITCH**



TECHNICAL DATA

Electric engine power	kW	7,5	Water inlet filter	Mesh	60
Fan diameter	mm	900	Y Filter	µm	500
Water consumption	l/m	37 - 43	Electric Tilting system	-	0 - 35°
Coverage (without wind)	m	30 - 40	Automatic oscillation	-	0 - 340°
Max. water throw height	m	10	Dimensions	mm	1719 x 1345 x 2065
Water connection	-	UNI 45 or STORZ or CAMLOCK	Weight	Kg	850
Min. inlet Water pressure	bar	1.0	Hydraulic generator included	kVA	12
			Secondary Hydraulic circuit	-	40 l - 140/150 bar

